RENZ®

RW home ‖ eco home

Entry-level desktop home range for punching and RENZ RING WIRE® binding.
For use with low volumes of books at home.

Illustrated: RW home

Customer benefits:

- Binds up to 120 sheets
- Closure control guarantees easy ring wire closure for perfect presentations every time
- Staggered punching pins for better punching
- A4, A5 format changes
- Adjustable side lay for perfect punching registration
- Easy to empty sliding waste tray
- Measures the document
- Perfect bind every time
- Compact design to fit any size home or small office

Maximum:

Width
300 mm

Punch up to
1.0 mm

Bind up to
12 mm

Output:

Max. punched sheets per hour
2,000

Max. bound products per hour
50

All performance outputs are based on 80 gsm paper and may vary depending on the product type, the working environment and the operator. For best punching results we recommend a paper thickness of 0.5 - 1.0 mm.

RENZ®

Punching
Insert the paper into the punching slot and pull the lever forward to punch the paper.

Insertion
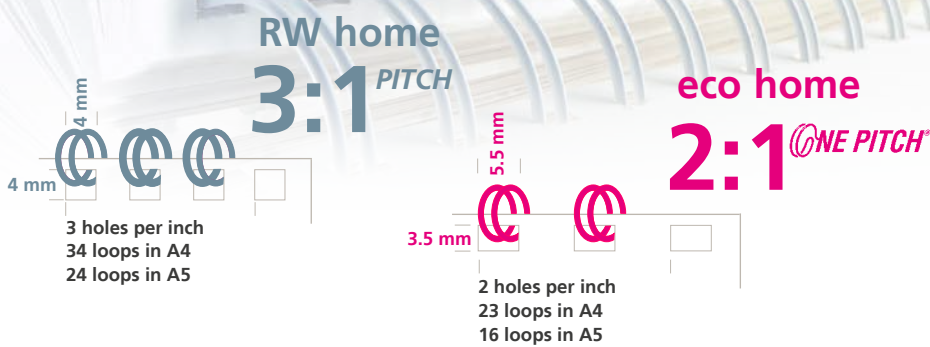After punching insert the sheets into the integrated holding fixture.

Closure
Take the punched book out of the holding fixture and insert it vertically into the closing unit to close the wire element.

To finish
Remove the document.

RW home
3:1 *PITCH*

4 mm

4 mm

3 holes per inch
34 loops in A4
24 loops in A5

eco home
2:1 *(ONE PITCH®*

5.5 mm

3.5 mm

2 holes per inch
23 loops in A4
16 loops in A5

By using the integrated measuring scale it is very easy to determine the diameter of the wire element. Put the book under the measuring scale, push the slider downwards and read the correct diameter of the binding element.

Technical data:	RW home	eco home
Punching capacity - sheets per hr:	2,000	2,000
Min. punching width:	10 mm	10 mm
Max. punching width:	300 mm	300 mm
Min. unpunched length:	50 mm	50 mm
Max. unpunched length:	500 mm	500 mm
Max. punching thickness:	1 mm	1 mm
Punching operation:	Manual	Manual
Punch pattern:	Square 4.0 x 4.0 mm	Oblong 5.5 x 3.5 mm
Pitch:	3:1	2:1
Selectable punch pins (QSA):	No	No
Variable margin depth:	No	No
Binding thickness:	1 - 12 mm	1 - 12 mm
Binding element Ø:	6,9 - 14,3 mm 1/4" - 9/16"	6,9 - 14,3 mm 1/4" - 9/16"
Min. binding width:	10 mm	10 mm
Max. binding width:	300 mm	300 mm
Binding operation:	Manual	Manual
No. of books output per hr:	50	50
No. of calendars output per hr:	-	-
Machine dimensions L x W x H:	300 x 540 x 140 mm	300 x 540 x 140 mm
Machine weight:	6.5 kg	6.5 kg
Machine packaging dimensions L x W x H:	460 x 190 x 370 mm	460 x 190 x 370 mm
Machine weight with packaging:	7 kg	7 kg
Power requirement:	-	-

Use the adjustment scale to select the correct diameter for closing wire.

Customer friendly colour packaging.